


STAR B LED

Park and Street Luminaires



Images for the product family and options:

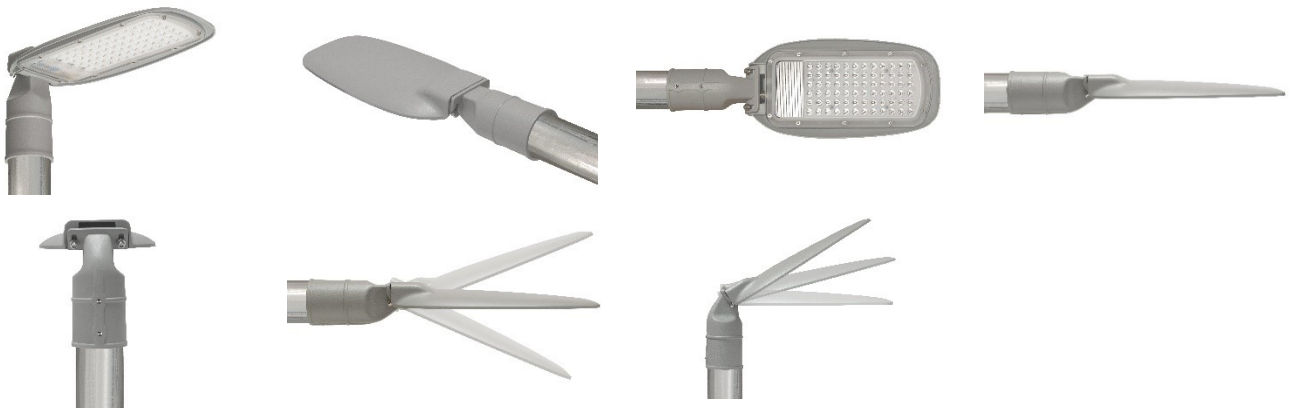

Description: Pole-mounted basic LED street luminaire
 Light distribution type: direct
 Optical system: polycarbonate asymmetric street optics, UV stabilized, impact resistant
 Housing: aluminium
 Colour: light grey (RAL 7042)

General data: Mains voltage: 220-240V, 50/60Hz
 LED lifetime, h: 50000/L70B50
 SDCM: 6
 Protection class IEC: I
 Ingress protection code: IP65
 Mechanical impact resistance: IK08
 Operating temperature range, °C: ta -20...+40

Installation: With two screws on Ø60mm horizontal or vertical pole, on the wall (mounting bracket to be ordered separately). Cable, 0.45m, 3x1.00mm²

Environment: Outdoor

Application: Parking area, public space

Product	Length, mm	Width, mm	Height, mm	Luminaire output*, lm	System power*, W	System efficacy*, lm/W	CRI	CCT*, K	Weight, kg
Star B LED1x5000 H212 T740	447	166	72	5000	50,0	100	70+	4000	1,20

* Tolerance range for optical and electrical data: ±10%. Values apply to an ambient temperature of 25°C. NORTHCLIFFE LIGHTING is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification

Available options:
 T740 Colour temperature 4000K, CRI 70+